

TA 2 S KNX


Item no.: 4969222



KNX Binary inputs

Description

- 2-way key interface
- 4-pole cable connection
- Free allocation of functions: Switch/key, dimming, blinds, valuator, sequences, controlling LED
- Binary input/binary output sensor interfaces
- Can be installed in flush-mounted sockets with conventional sensors/switches
- Flexible LED controlling, thanks to increased output current of 3 mA commercially available LEDs and low current LEDs can be controlled
- Inputs can be reconfigured to outputs with parameterizable flashing and pulsing function
- Colour coding of wiring pairs

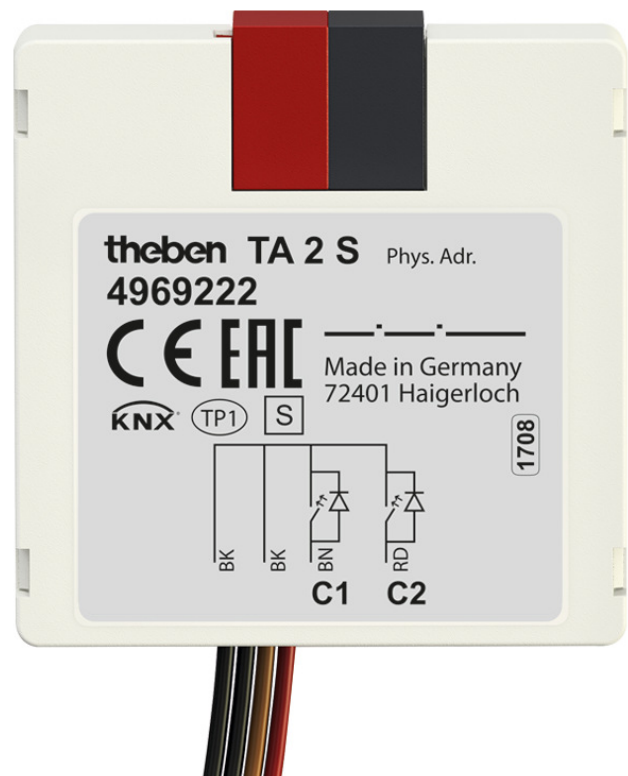

Technical data

TA 2 S KNX	
Operating voltage KNX	Bus voltage, ≤ 10 mA
Installation type	in flush-mounted socket
Type of connection	KNX bus terminal
Number of inputs	2
Max. cable length	30 m
Length connecting wires	25 cm
Contact voltage	5 V

TA 2 S KNX	
Contact current	0.5 mA
Reaction in case of bus recovery	Adjustable
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	III

Subject to technical changes and misprints

additional information at: www.theben.de/product/4969222


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

TA 2 S KNX

Item no.: 4969222

theben

Scale drawings

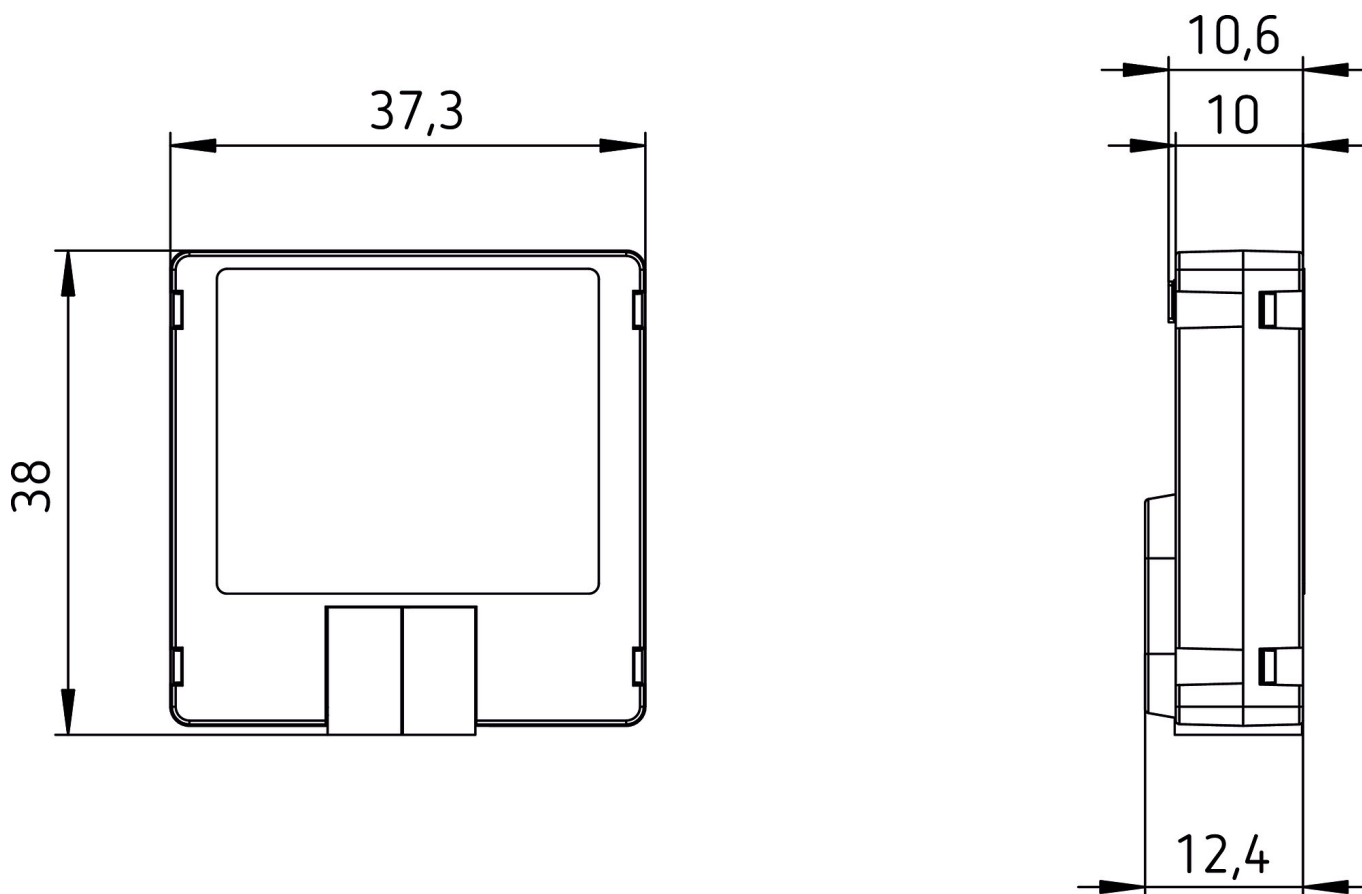

Subject to technical changes and misprints

additional information at: www.theben.de/product/4969222

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.